

The JETRIX logo is located in the top right corner. It features the word "JETRIX" in a bold, white, sans-serif font, with a yellow diagonal line through the "X".

JETRIX

Roll Big.
Rule Bigger.

JETRIX 5M Roll to Roll UV Printer



XGR500

- Stable material supply with large diameter 5m pinch roll and tension-meter
- Outstanding colour and durability using InkTec's JETRIX exclusive ink
- High print quality with the latest Konica 1024A printhead


XGR500

EXPERIENCE NEW POSSIBILITIES WITH UV ROLL-TO-ROLL PRINTING!



JETRIX

SPECIFICATIONS

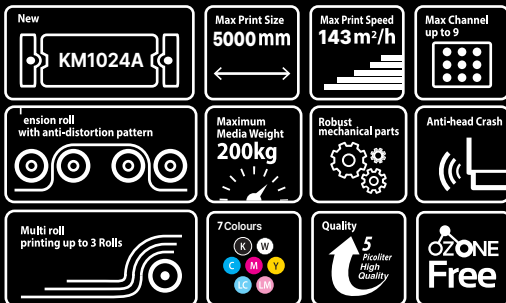

- Konica KM1024A print head
- Multi roll printing up to 3 rolls
- High productivity (Max. 143m²/h)
- Tension roll with anti-distortion pattern
- Improved front/rear double rubber pinch roll
- Print stability due to robust mechanical parts
- Collision-Avoidance safety sensor
- Wide capability of media



- Good scratch and abrasion resistance
- Eco-Green Inks (GREEN GUARD Certification)
- Excellent Ink adhesion

XGR500							
Print Head		Konica KM1024A					
Head Array		Max. 18 Heads (6×1 / 6×2 / 6×3)					
Colour Configuration		CMYKLcLm + WV					
Printing Width		5.0m Edge to Edge					
Printing Media		PVC, Flex, Banner, Backlit, Textile, Window Film					
Printing Speed (Weak Masking)	4pass	Single Array	45m²/h	Double Array	90m²/h	Triple Array	143m²/h
	6pass		32m²/h		65m²/h		105m²/h
	8pass		23m²/h		45m²/h		70m²/h
Drive Precision		High Precision Metal Raster System <1um					
Resolution (dpi)		479×720 (4pass), 479×1080 (6pass), 479×1440 (8pass)					
Air System		Vacuum Chamber Negative Pressure					
Ink Supply System		Diaphragm Pump / Level Sensor					
Circulation System		White Circulation					
Media Feed System		Dual Servo Motors					
Drive System		Linear Motor					
Ionizer		Double Wing Type / Auto Measuring					
Rip Software		CALDERA, ONYX, SAI, Print Factory					
Electrical Specifications		220V AC, 50/60Hz, 30A					



Jiří Křístek - OFSITO s.r.o. , 687 12 Bílovice 224

Tel.: + 420 734 490 559 E-mail: knebl@ofsito.cz www.jetrix.cz